



Electro Storm XT26

2600W Point-Source LED with Dynamic White CCT & Tint Control

Product Description

Electro Storm XT26 is a 2600W point-source LED with dynamic white CCT & tint control. The 'X' stands for 'cross-fade', and the 'T' stands for 'tint'.

3,500W(AC)/3,200W(DC) Power Input

The Electro Storm XT26 has a input power (AC) of 3,500W, delivering a full 2,600W of output power which is 58,600Lux @3m (5600K) with a medium-angle reflector.

Dynamic White Light CCT and Tint Adjustment

Electro Storm XT26 adopts the latest dynamic white light chipset and supports G/M color correction with a +/- 0.005 dUV adjustment range between 3,200K and 6,500K.

Wide CCT Range: 2,700K ~ 6,500K

The Electro Storm XT26 has an fully tunable CCT from 2,000K to 10,000K and Green/Magenta adjustment.

Dual Accessory Mount

With dual accessory mounts, the Electro Storm XT26 features both the universal Bowens Mount and all-new electronic A-Mount compatibility.

IP65 Dust & Water-Resistant

The reliable IP65 dust and weatherproof construction allows the Electro Storm XT26 to handle the most demanding working environments.

Advanced Liquid-Cooling Technology

As Aputure's first liquid cooling professional light series, Electro Storm XT26 breaks through the heat cooling limit of LED light and brings stable and high brightness output performance.

PWM & High-Speed Flicker-Free Dimming Modes

The Electro Storm XT26 adopts advanced HyperSync technology which brings smoother linear 0.1-100% stepless brightness control and more stable output.

The new High-Speed Flicker-Free Dimming Mode meets the needs of shooting at 4,000FPS (minimum brightness limit: 20%).

NEW Motorized Electronic Accessories

The Electro Storm XT26 features a dual accessory mount which allowing users to attach both universal Bowens mount modifiers and the new A-mount accessories including the Aputure motorized electronic F14 Fresnel, Motorized Yoke and the new A-mount Reflectors.



Motorized Electronic F14 Fresnel



Motorized Yoke



A-mount Reflectors
(Wide/Medium/Narrow-angle)



Spotlight Max
(19°/36°/50°) (Bowens Mount)

What's in the Box

XT26 Lamp Head*1

Removable Yoke*1

Head Cable(15m)*1

Control Box*1

AC Power Cable(6m)*1

Control Box Handcart*1

Medium-angle Reflector *1

Barndoors Adaptor Ring*1

Barndoors*1

A-Mount Protection Cover*1

Main Features

- **2600W** Point-Source LED with **Dynamic White CCT & Tint Control**
- **58,600 lux @3m (5600K)** with Hyper Reflector (Medium)
- Fully Tunable CCT from **2,700K ~ 6,500K**
- G/M color correction with a **+/- 0.005 dUV adjustment** range between 3,200K and 6,500K.
- CRI \geq 96, TLCI \geq 97, CQS \geq 94, SSI (D32): 84, SSI (D56): 73, TM-30 Rf: 94 (avg.), TM-30 Rf: 102 (avg.)
- **Dual Accessory Mount** (A-Mount & Bowens Mount)
- Compatible with **Aputure Motorized Electronic F14 Fresnel, Motorized Yoke** and **Spotlight Max** (Sold Separately)
- Motorized Accessories are **Adjustable via Control Box**
- Advanced **Liquid-Cooling Technology**
- **IP65** Dust & Water-Resistant
- **HyperSync Technology**: Smoother Linear 0.1 ~ 100% Stepless Brightness control
- **High-Speed Flicker-Free** Dimming Modes
- **2 Output Modes**: Max & Constant
- Supports **Studio Mode**
- Supports **Lead-Follow Mode**
- **6 Built-in DMX Profiles** and Customized DMX Setting When Losing Signal
- **4 Built-in Dimming Curves**
- **4 Fan Modes**: Smart, High, Medium, Silent
- >90% of Colors Within Rec.2020 Color Space
- **9 Built-in Lighting FX**
- Supports 100-240V/50-60Hz/ 36A-14A AC Inputs
- Supports Battery Operation via Dual 48V DC Inputs
- Included **Control Box Handcart** for Easy Transportation

Product Specifications

AC Input Power(Max)	3,500W	
DC Input Power(Max)	3,200W	
Output Power(Max)	2,604W @5600K	
CCT	2,700K~6,500K	
G/M	+/- 0.005 dUV (@3,200K~6,500K)	
CRI	avg. \geq 96.5	
	\geq 97 @3,200K	
	\geq 96 @5,600K	
TLCI	avg. \geq 97	
	\geq 98 @3,200K	
	\geq 98 @5,600K	
CQS	96 @3,200K	
	94 @5,600K	
SSI (D32)	84	
SSI (D56)	73	
TM-30 Rf(avg.)	94	
TM-30 Rg(avg.)	102	
Lumens @5600K	245,000Lm	
Power Supply	AC	100-240V/50-60Hz/ 36A-14A
	DC 1&2	48V/33.5A (One DC only supply half output)
Water-proof Level	IP65	
Operating Temperature	-20°C ~ +45°C	
Storage Temperature	-40°C ~ +85°C	
Firmware Upgradeable	USB, Sidus Link App	
Control Methods	On-board, Sidus Link App, DMX512, Art-net & sACN via etherCON, LumenRadio GRMX	
Wireless Operating Range (Bluetooth)	\leq 100 m	
Wireless Operating Range (LumenRadio)	\leq 100 m	
Cooling Method	Active Cooling: Liquid Cooling, Fan	
Noise Level (Max)	High	Control Box: 47dB Lamp Head: 61dB
	Medium	Control Box: 43dB Lamp Head: 52dB
	Silent	Control Box: 30dB Lamp Head: 30dB

Photometrics

3 Meters (lux)

CCT	Bare Bulb	Wide-Angle Reflector	Medium-Angle Reflector	Narrow-Angle Reflector	Spotlight Max 50°	Spotlight Max 36°	Spotlight Max 19°	F14 Fresnel 18°	F14 Fresnel 50°
2,700K	6,210	18,720	36,300	107,300	2,630	5,820	11,420	52,100	12,520
3,200K	7,460	22,350	44,100	129,800	3,150	7,050	13,320	62,900	15,130
4,300K	8,960	27,380	52,800	156,300	3,730	8,460	16,470	75,900	18,280
5,600K	10,040	30,500	58,600	173,900	4,210	9,380	18,270	84,400	20,460
6,500K	9,130	28,100	54,300	159,800	3,870	8,520	16,960	78,000	18,950

5 Meters (lux)

CCT	Bare Bulb	Wide-Angle Reflector	Medium-Angle Reflector	Narrow-Angle Reflector	Spotlight Max 50°	Spotlight Max 36°	Spotlight Max 19°	F14 Fresnel 18°	F14 Fresnel 50°
2,700K	2,552	7,070	12,720	36,200	1,030	2,178	4,150	20,450	5,080
3,200K	3,080	8,360	15,360	43,600	1,238	2,632	5,010	24,720	6,160
4,300K	3,710	10,260	18,390	52,600	1,489	3,150	5,980	29,630	7,440
5,600K	4,110	11,170	20,530	58,000	1,644	3,500	6,670	33,000	8,330
6,500K	3,770	10,500	19,080	54,000	1,511	3,220	6,040	30,500	7,720

7 Meters (lux)

CCT	Bare Bulb	Wide-Angle Reflector	Medium-Angle Reflector	Narrow-Angle Reflector	Spotlight Max 50°	Spotlight Max 36°	Spotlight Max 19°	F14 Fresnel 18°	F14 Fresnel 50°
2,700K	822	3,360	6,210	17,930	467	1,152	2,157	10,660	2,750
3,200K	1,086	4,050	7,530	21,630	556	1,399	2,610	12,900	3,340
4,300K	1,456	4,880	9,050	26,040	680	1,675	3,120	15,480	4,020
5,600K	1,770	5,460	10,020	29,320	756	1,885	3,460	17,250	4,500
6,500K	1,715	5,060	9,270	27,010	700	1,767	3,200	15,960	4,180

Dimension & Weight


Dimension (L*W*H)	Lamp Head w/o Yoke	457*352*281mm
	Lamp Head with Yoke	457*497*684mm
	Control Box	283.5*262*550mm
	Yoke	591*88*497mm
	Medium-angle Reflector	306*266*252mm
	Barndoors	282*303*40mm
	Barndoors Adaptor Ring	303*263*87mm
	AC Power Cable	6m
	Head Cable	15m
	A-Mount Protection Cover	165*165*34mm
	Control Box Handcart	439*470*1054mm (Built) 200*470*703mm (Fold)
Weight	Lamp Head w/o Yoke	15.2kg
	Lamp Head with Yoke	18.4kg
	Control Box	21kg
	Yoke	3.2kg
	Medium-angle Reflector	1.55kg
	Barndoors	1.6kg
	Barndoors Adaptor Ring	0.6kg
	AC Power Cable	EU/UK/CN: 2.6kg US: 3.4kg JP: 2.5kg, AU: 1.3kg
	Head Cable	5.7kg
	A-Mount Protection Cover	0.2kg
	Control Box Handcart	7.22kg

Sales & Shipping Information


Electro Storm XT26 (Carton Version)			
	US	EU/UK/CN	KR
SKU	APP0308A91	APP0308A92	APP0308A94
UPC	6971842188697	6971842188703	6971842188727
Packing Dimensions	98*84*68cm	98*84*68cm	98*84*68cm
Net Weight	55.2kg	55.2kg	55.2kg
Gross Weight	83.2kg	83.2kg	83.2kg
Carton Quantity	1pc	1pc	1pc
Carton Dimensions	TBC	TBC	TBC
Carton Weight	TBC	TBC	TBC

Electro Storm XT26 (Carton Version)			
	AU	No Plug	/
SKU	APP0308A9E	APN0308A92	
UPC	6971842188741	6971842188734	
Packing Dimensions	98*84*68cm	98*84*68cm	
Net Weight	55.2kg	55.2kg	
Gross Weight	83.2kg	83.2kg	
Carton Quantity	1pc	1pc	
Carton Dimensions	TBC	TBC	
Carton Weight	TBC	TBC	

What's in the Box



XT26 Lamp Head*1




Removable Yoke*1



A-Mount Protection Cover*1



Medium-angle Reflector*1

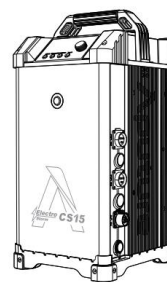

Control Box*1



Head cable(15m)*1




AC Power Cable(6m)*1



Barndoors Adaptor Ring*1



Barndoors*1

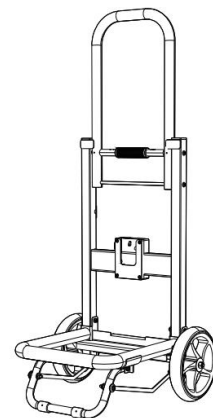

Control Box Handcart*1